



Zero Turn Mower

ZTR 72C

BIG JOBS REQUIRE BIG POWER











จ.นนทบุรี 11110



THE BEST BUDGET ZERO TURN FOR LANDSCAPERS


















Heavy Commercial

62C 54C 72C

	Displacement	Throttle
72C	1000сс	35HP 🖽
62C	1000сс	35HP EF
54C	1000сс	31HP
48C	750cc	31HP

- Zonsen XP1000 35HP EFI V-Twin
- Wider Stance Designed to provide ample room adding to the comfort for the
- Workable Hours

 ϵ









COMMERCIAL

Grade Engines

Zonsen XP1000 V-Twin

Displacement 1000CC

Throttle 35HP

workable hours 8h-10h



Ergonomic controls Comfortable, user-focused controls put everything needed to operate the mower

within easy reach.




Rugged Frame Stylish and strong engine protection comes standard.



บริษัท บีเวิร์ค เอ็นจิเนียริ่ง (2015) จำกัด 175/12 หมู่ 3 ต.พิมลราช อ.บางบัวทอง จ.นนทบุรี 11110







062-993-8224







CUTTING HEIGHT

The deck lift system is spring assisted and allows convenient hand free operation. A simple locking pin adjusts cut height.

1-5inch



High-Back seat

Deep cushions and generous bolsters offer superior comfort and reduced vibrations



ROPS

ROPS bars help protect you in the event of a roll over and can be folded for low-hanging branches



Rear Hitch Kit

Rear hitch kit available for multiple user applications.



Fuel Your Domination.

With a 15.8-gallon fuel capacity, you own the job. No refills, just relentless power.



FABRICATED CUTTING DECK

High-capacity mower decks provide superior mowing quality and versatility Durable deck straps feature large idler pulley design to minimize wear and tear Heavy-duty steel construction, full floating decks

Number of blades

Three pieces

Cutting width 72inch/1828mm

Cutting height rang

1.0-5.0 inch/25.4-127mm



www.beework2015.com



062-993-8224









REMOVABLE FOOT PLATE

Quick access to cutting deck for easy maintenance and clean-up



ADJUSTABLE STEERING LEVERS

Motion control levers are shaped and positioned with operator comfort and ease of control in mind.



Oversized, Durable Body

Combined with large tires to deliver superior strength, longer lifetime and a


Robot Welding (tolerance ≤ 0.5mm, 100% consistency): Electrophoretic Coating + Powder Spraying.

Salt Spray Test:

1,500 hours without rust spots (vs. GB standard 800 hours)

Weatherability:

QUV accelerated aging for 3,000 hours, color difference $\Delta E < 1.5$

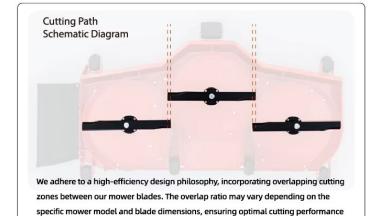



across different operational requirements.

GRASS-FRIENDLY TIRES

Designed for a long lifespan while staying gentle on your grass



STRONG, ADJUSTABLE CLUTCH FOR LONG LIFE

The Ogura Electromagnetic Clutch Brake provides excellent starting and stopping power for the cutter deck to its maintain strength for longer life.





Carlisle V-Belt

The wedge-shaped cross-section of the V-Belt increases the contact area with the pulley, resulting in



Heavy duty rubber discharge chute

The discharge chute is built of heavy-duty rubber to withstand wear and tear while protecting nearby property.








Actual product may differ from photos.



บริษัท บีเวิร์ค เอ็นจิเนียริ่ง (2015) จำกัด 175/12 หมู่ 3 ต.พิมลราช อ.บางบัวทอง จ.นนทบุรี 11110













คุณสมบัติทางเทคนิค/ Specifications

เครื่องยนต์/ Engine Systems

เครื่องยนต์/ Engine 35 แรงม้ำ/ Hp. V-Twin

1000 ซีซี/ cc. ความจุกระบอกสูบ/ Displacement

ชนิดของน้ำมันเชื้อเพลิง/ Fuel Type เบนซิน/ Gasoline

ความจุของถัง/ Fuel tank capacity 60 ลิตร/ L

ระบบส่งกำลัง/ Transmission ไฮโดรเกียร์ Hydro Gear ZT-5400

0-19.2 กิโลเมตรต่อชั่วโมง/ Kmph. (0-12MPH) ความเร็วเดินหน้า/ Forword Speed

0-9.6 กิโลเมตรต่อชั่วโมง/ Kmph. (0-6 MPH) ความเร็วถอยหลัง/ Reverse Speed

ระบบไฟฟ้า/ Electric Systems

สตาร์ท ไฟฟ้า/ Electrical start สตาร์ท/ Starter

คลัชแม่เหล็กไฟฟ้า/ Electromagnetic Clutch การเปิดใช้งานใบมืด/ Blade Engagement

มิเตอร์วัด ชม.การทำงาน/ Hour Meter มาตรฐาน/ Standard

ไฟ แอลอีดี ด้านหน้า/ LED Head Light มาตรฐาน/ Standard

ระบบตัดหญ้า/ Cutting Systems

เหล็กเชื่อม/ Welded steel ชนิดของถาดตัดหญ้า/ Deck Type

72 นิ้ว/in 1.828 มิลลิเมตร/mm. ตัดหญ้าได้กว้าง/ Cutting width

ตัดหญ้าสูง-ต่ำ/ Cutting height 1 นิ้ว/in-5 นิ้ว/in (25.4-127 มิลลิเมตร/ mm)

อลูมิเนี่ยม/ Aluminium แกนหมุน/ Spindles

จำนวนใบมัด/ Number of Blades 3 lu/pc.

อื่นๆ/ Other

หน้า/ Front 13*6.5-6 ยางรถ/ Tire

หลัง/ Rear 26*12-12



